

D90 & D90Q Relays






Product General Purpose Relays

- Features**
- Quick-connect terminals
 - UL recognized
 - Universal mounting
 - 1-year warranty
 - Break-away tabs









STOCK NO	SWITCH TYPE	CONTACT CONFIGURATION	Coil Side		Switched Side		MOUNTING TYPE	DIMENSIONS (in) (DxWxH)	WEIGHT (LBS)
			COIL VOLTAGE (VAC)	FREQUENCY (Hz)	FLA (A)	RES (A)			
D90-290Q	SPST-NO	A	24	50/60	14 @ 125 VAC 8 @ 277 VAC	25 A @ 120/277 VAC	Universal	3 x 2 x 1.75	0.2
D90-291Q			120						
D90-292Q			240						
D90-293Q	SPDT	B	24	50/60	14 @ 125 VAC 8 @ 277 VAC	25 A @ 120/277 VAC	Universal	3 x 2 x 1.75	0.2
D90-294Q			120						
D90-295Q			240						
D90-360	SPST-NO	C	24	50/60	14 @ 125 VAC 8 @ 277 VAC	25 A @ 120/277 VAC	Universal	3 x 2 x 1.75	0.2
D90-362			120						
D90-370			24						
D90-372	SPDT	D	120	50/60	14 @ 125 VAC 8 @ 277 VAC	25 A @ 120/277 VAC	Universal	3 x 2 x 1.75	0.2
D90-380			24						
D90-382			120						
D90-384	DPST (NO+NC)	E	240						

Terminal Layout (bottom view)



Electrical Diagram

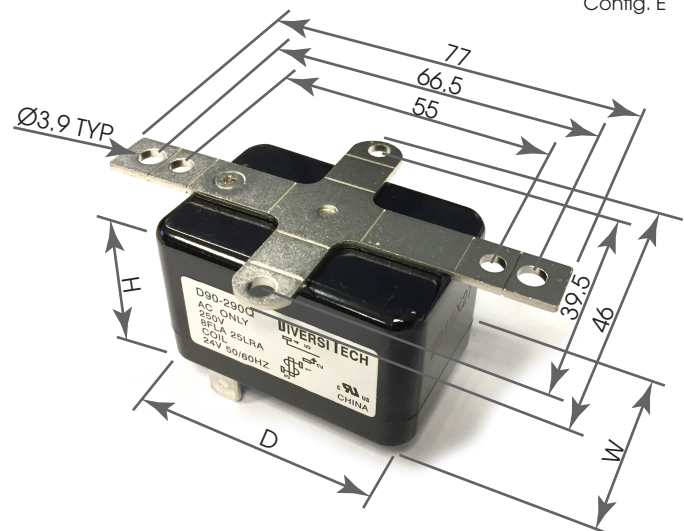

Overall Dimensions (mm)